




OKLAHOMA GENERATOR


405-321-6631 | OKGEN.COM

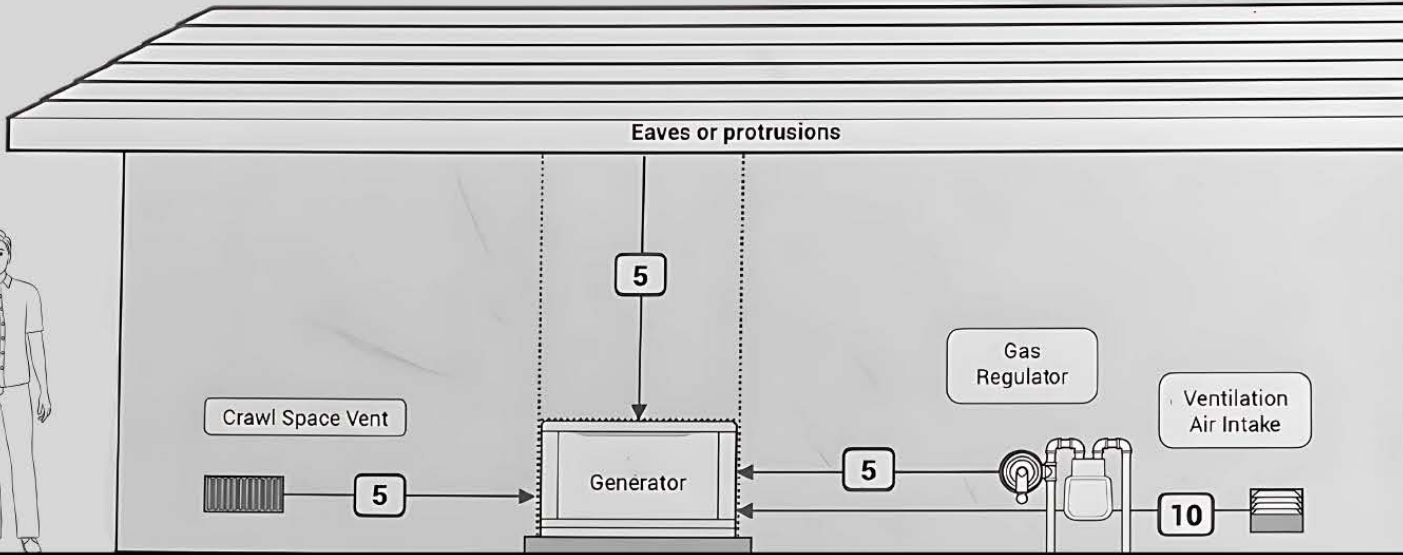

5 foot rule

- A/C or Heat pump units
- Gas regulator on meter
- Doorways
- Non-sealed windows
- ALL vents on exterior of home*
- Between top of unit and any overhanging surface

*Excludes air intake vents

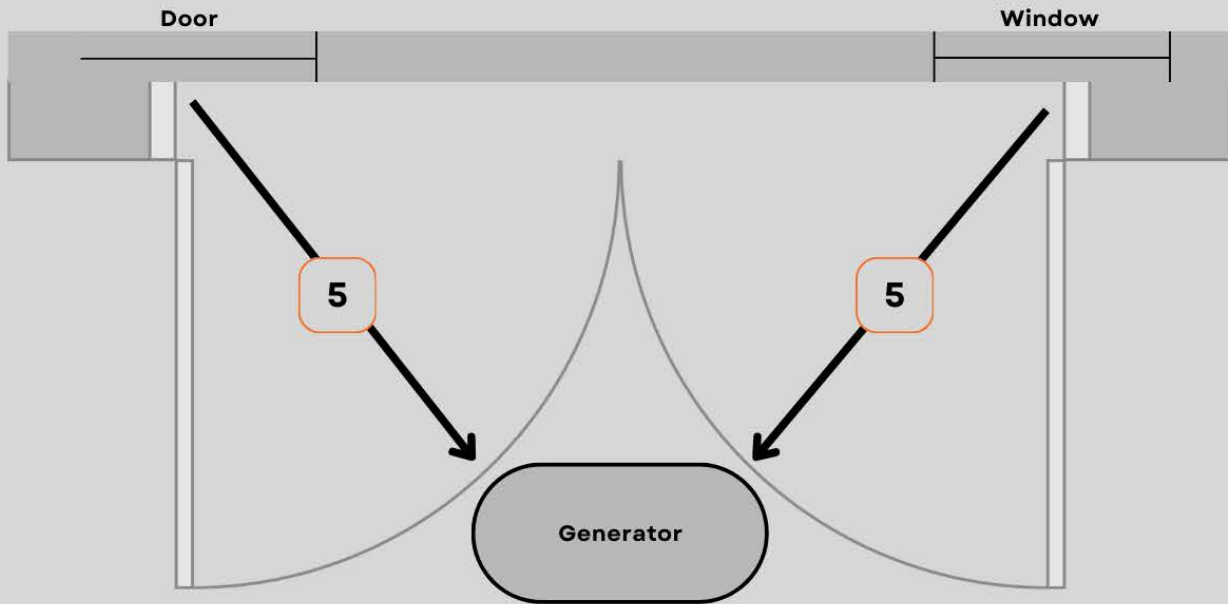


18 inch rule

- Back of generator to anything



36 inch rule

- Any equipment
- Front of generator
- Sides of generator
- If directly in front of electrical panels or electrical meters


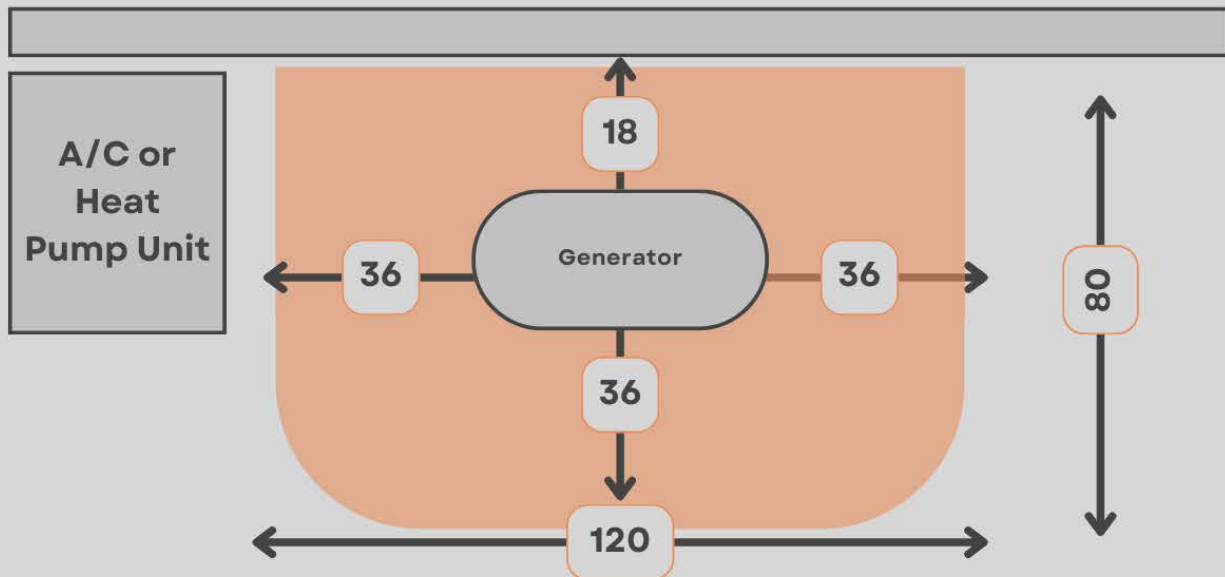


10 foot rule


- Air Intake Vents (HVAC Make-up air, Tankless water heaters, etc.)
- Propane Tanks
- Package HVAC Units

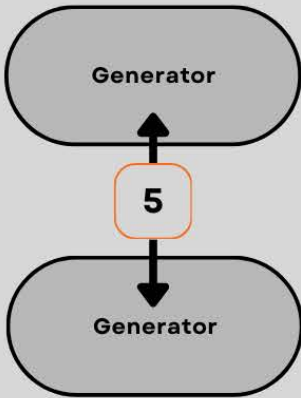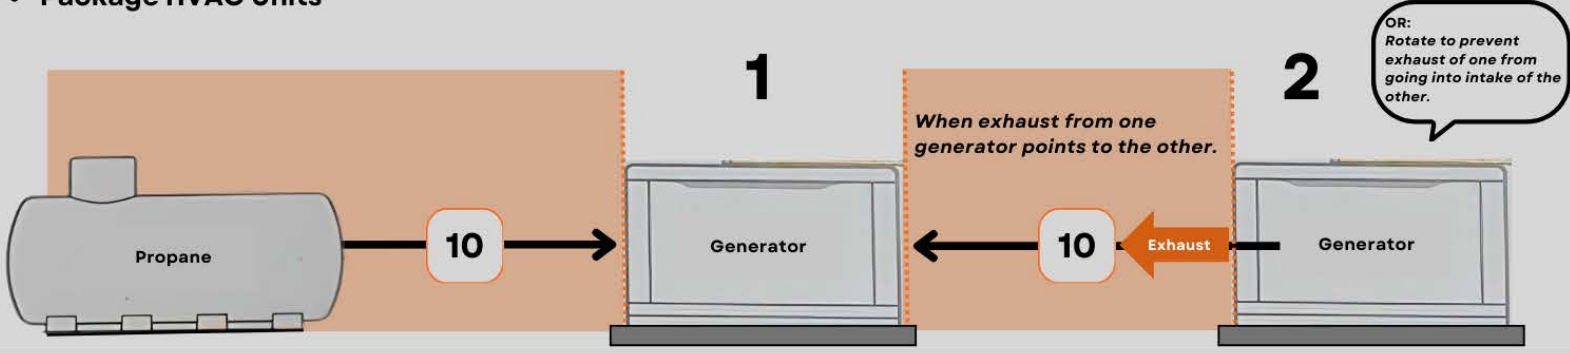

Parallel Generator Units installed side by side - must be installed parallel to each other 3 feet apart.

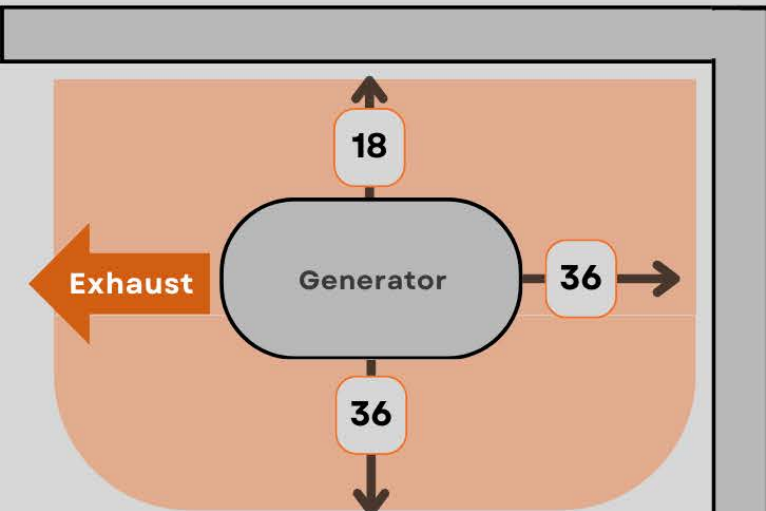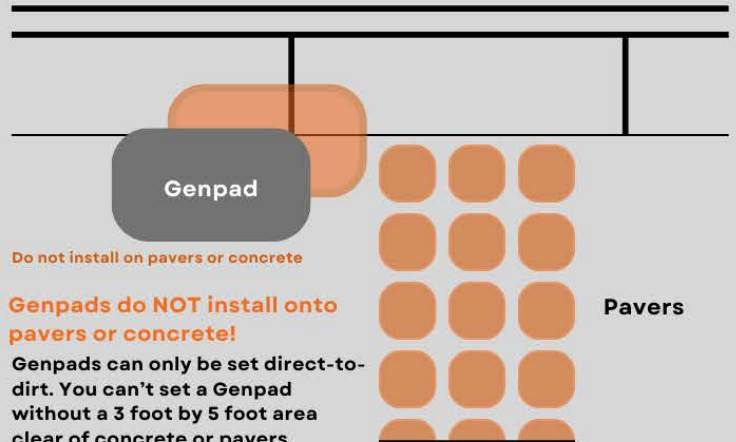

Exhaust must NOT point toward "dead spots" on the home or inside corners

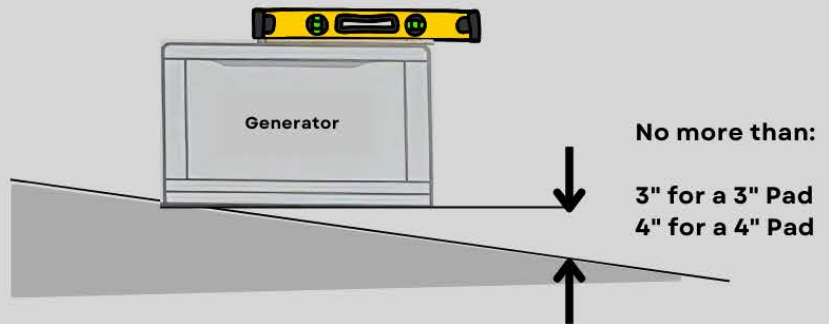

Genpads must be set on a close to level surface. There can be no more than 3" difference in height across the length of a 3" thick Genpad, or 4" difference for a 4" thick Genpad.